


1/23 第1図- *万*·5. /

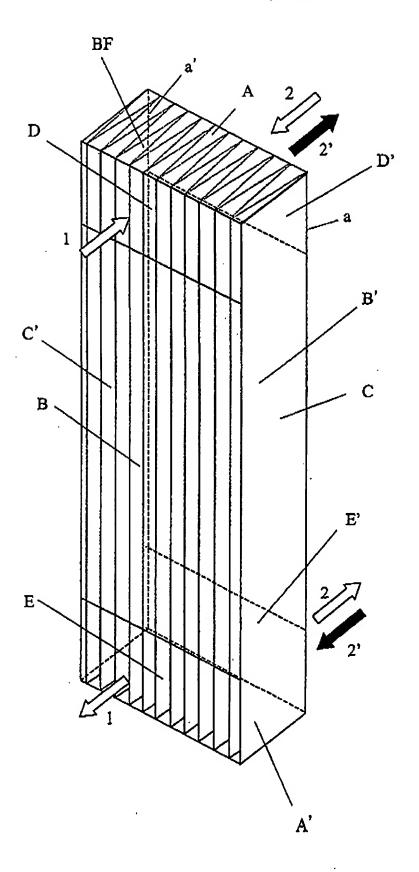





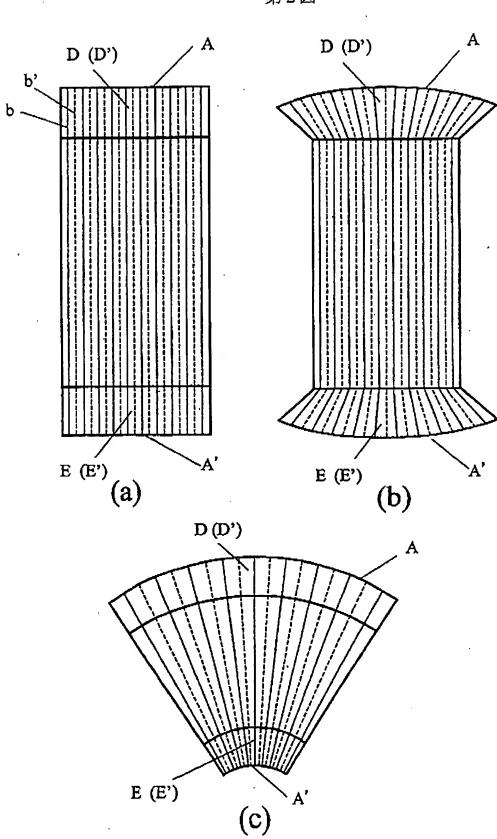


BF


E'

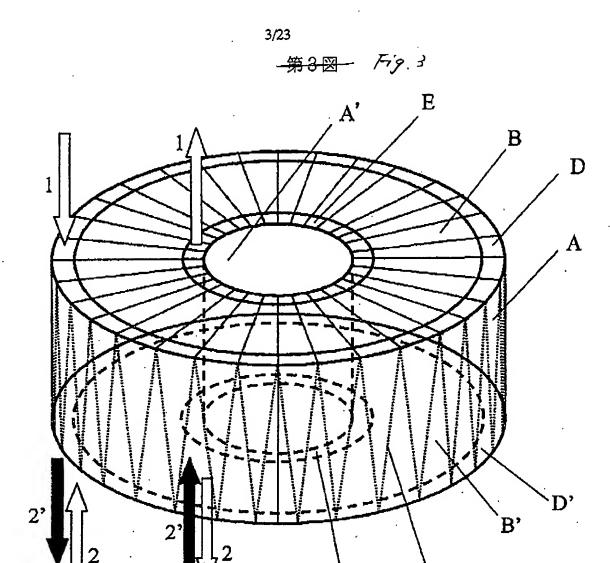



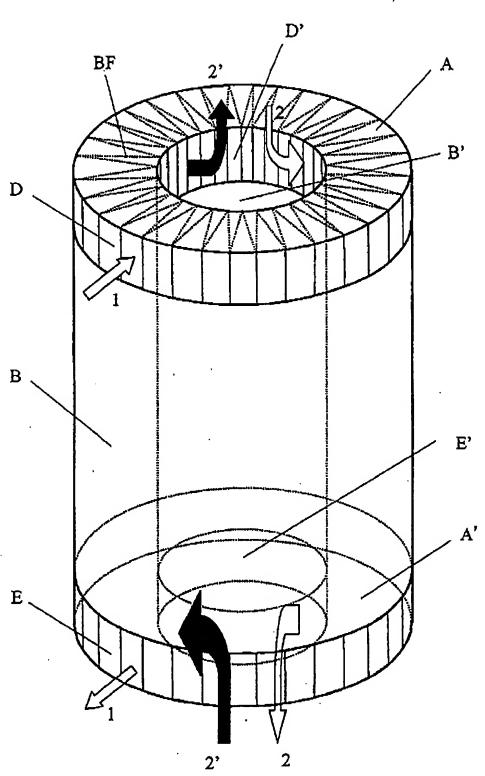



5/23 -第5図- Fig.5

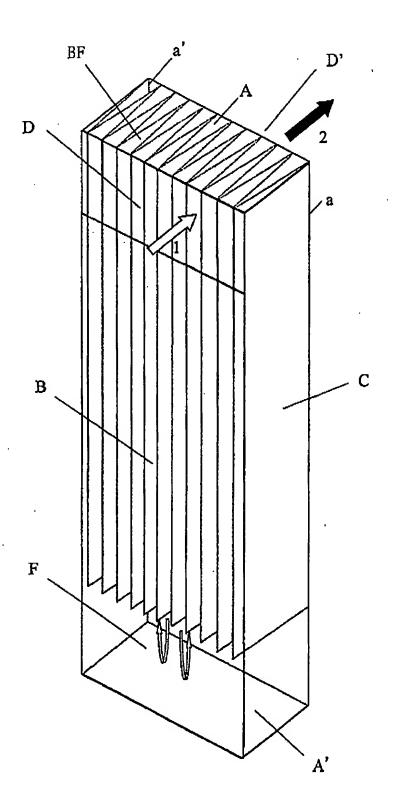



MM/EDE CO

6/23 -第6図- Fig. 6

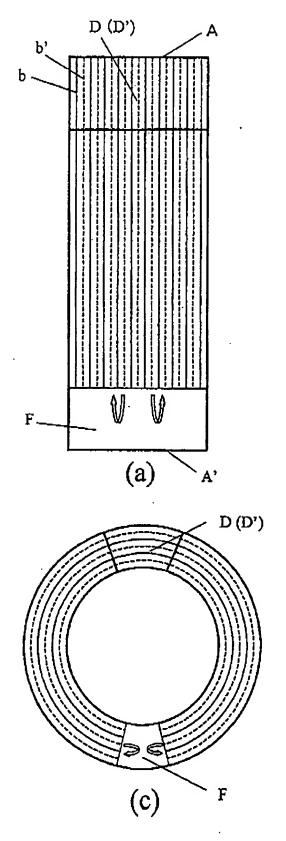

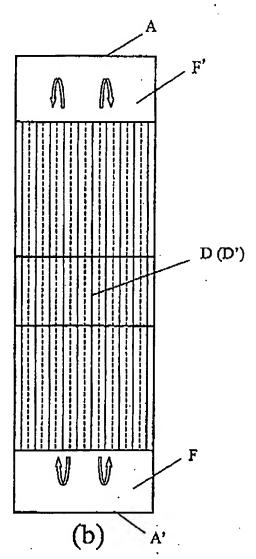


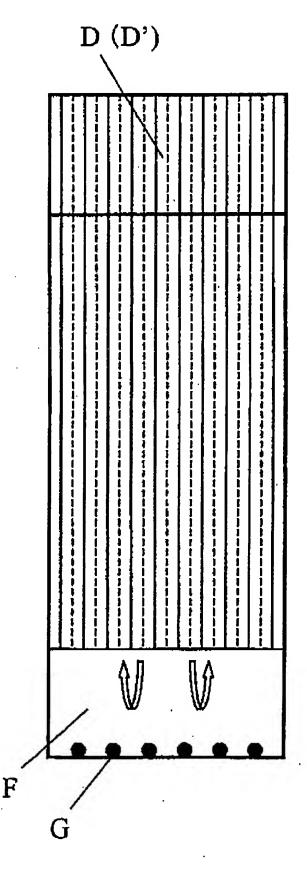

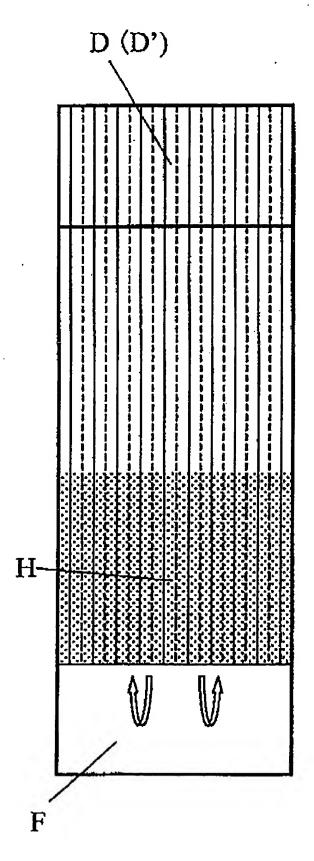


9/23


-第9图- Fig. 9

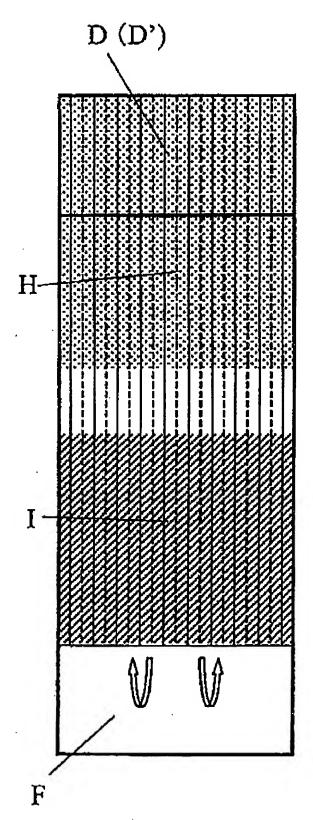


5 # 94/107 10/521776


10/23

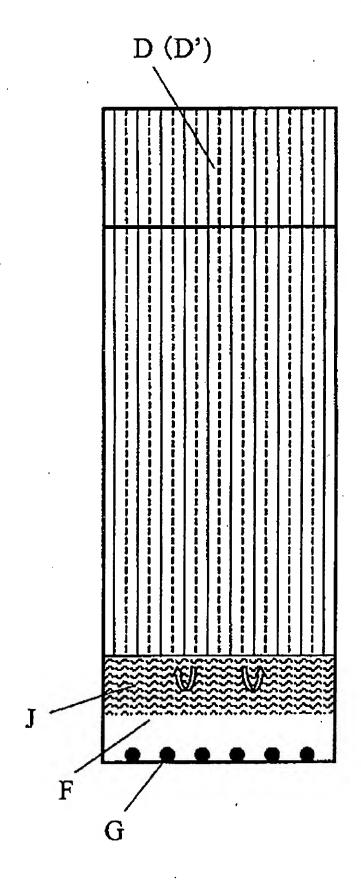

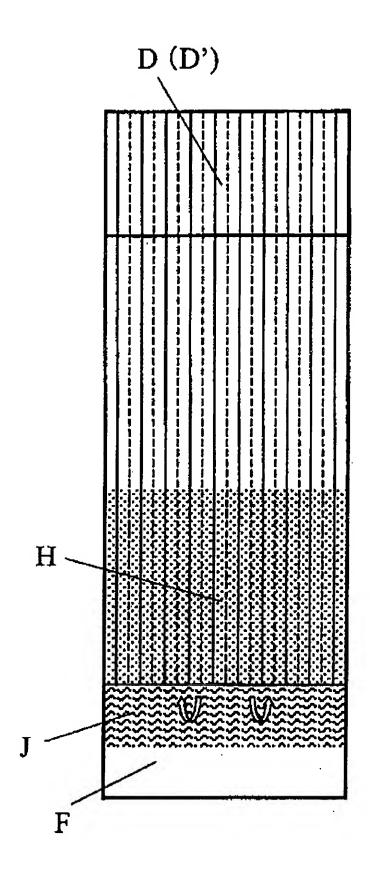


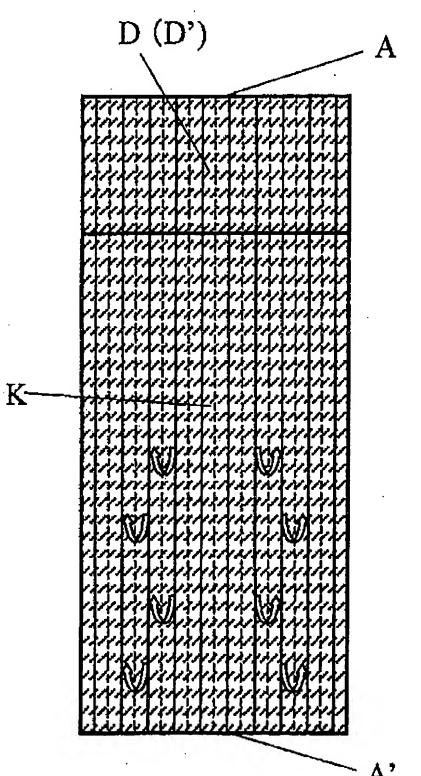

13/23 -第13四- Fig. 13

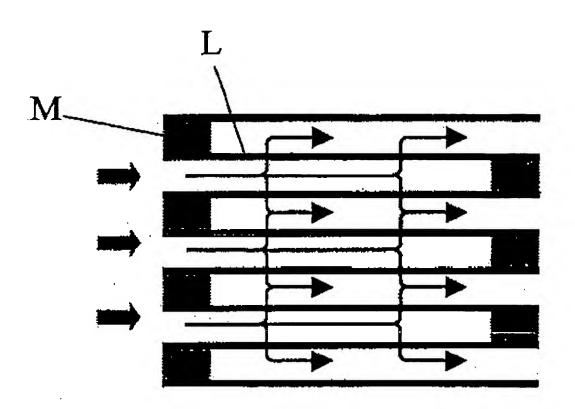


14/23 - 第1-4回- 万9、14

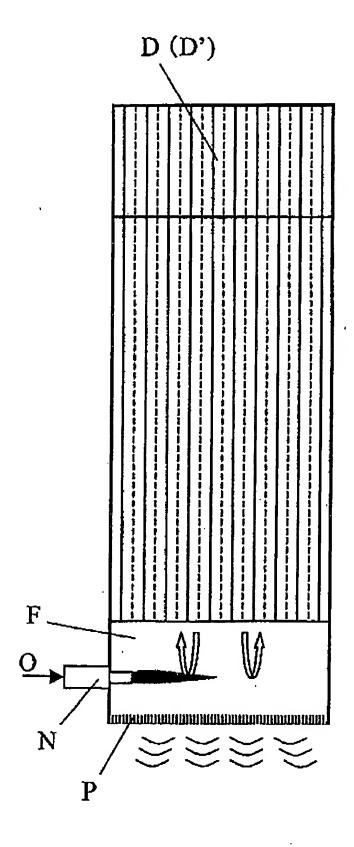


;0355613955 # 99/107 20/52:41

15/23

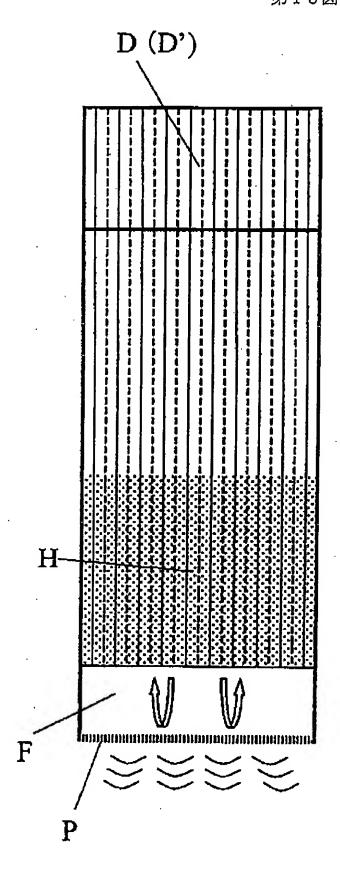

10/300 770


16/23 第16回 Fig. 16

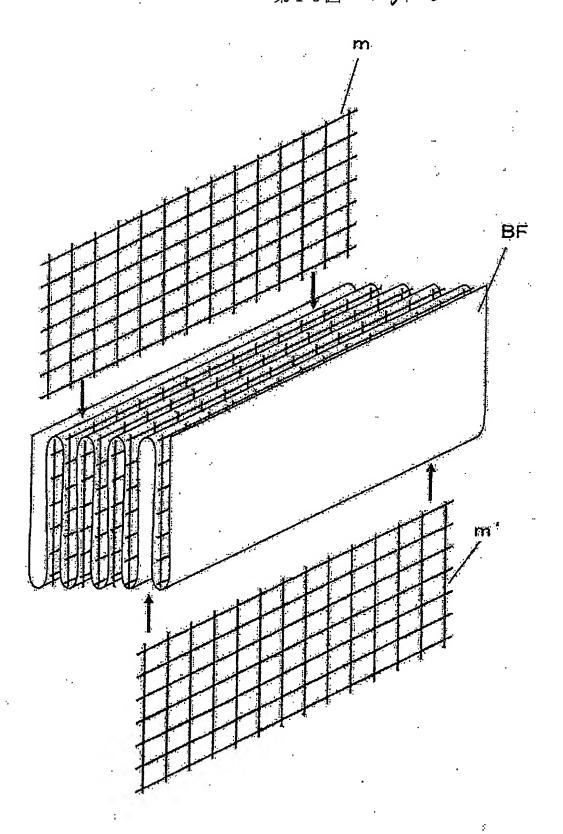


10/526 7/6

17/23

-第17四ー 万タ,17

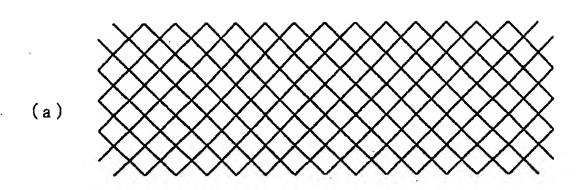

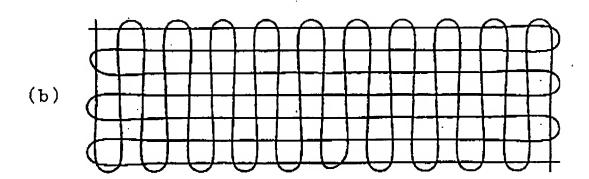


A / へ (a): 網目が斜方のスペーサー用金網 A / へ (b): 端部をループ状に加工したスペーサー用金網

[Fig. 17]

A1: (a): WIRE MESH FOR SPACER HAVING OBLIQUE MESH

A2: (b): WIRE MESH FOR SPACER WORKED IN LOOP AT END

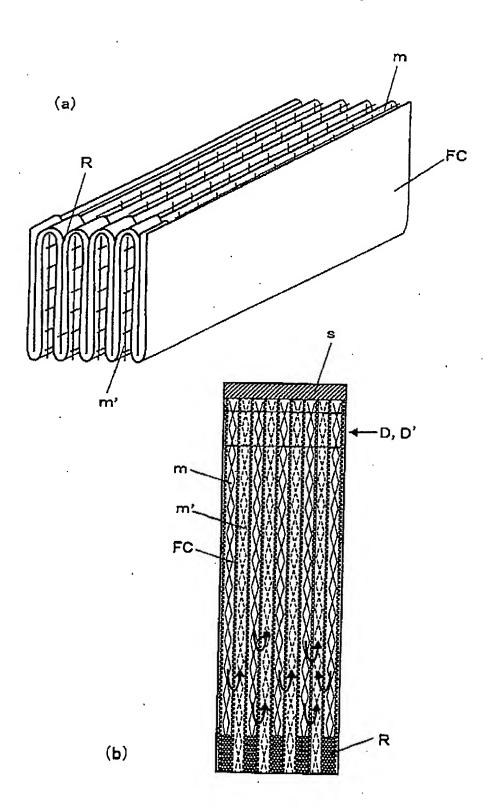


#103/107 **10/5217**7%

. 19/23

(P)


(a)

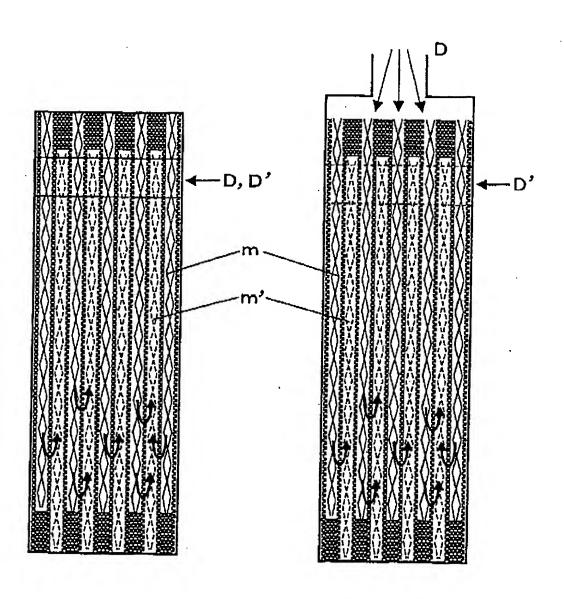


10/52177h

20/23

第20图 7/9,20

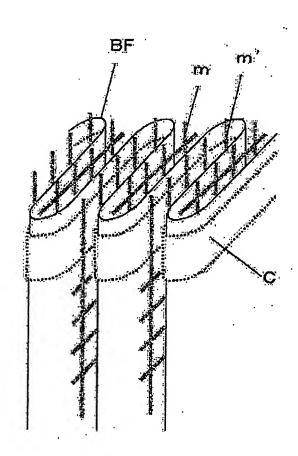

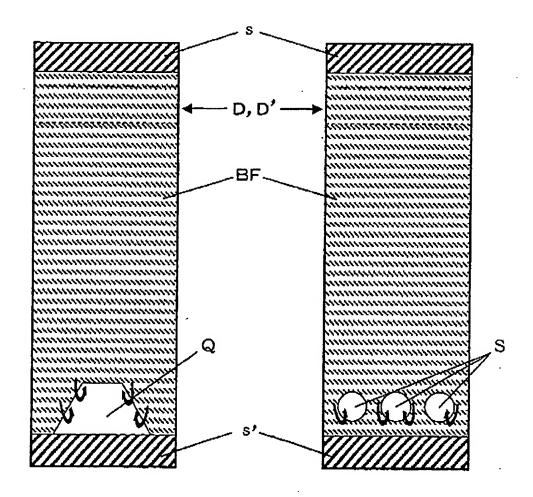

第2.2四 Fig. 12

(p) (a)

